

Balanced Mixers

FPBM-10000-44000

10~44GHz

Features:

- Low Conversion Loss
- High Isolation

Applications:

- Wireless
- Transceiver
- Laboratory Test
- Broadcast

Electrical

LO/RF Frequency	10~44GHz
LO Input Power	15dBm typ.
IF Frequency	DC~14GHz
Conversion Loss	10dB typ.
LO/IF Input Voltage	11dBm max.
LO & RF Isolation	47dB typ.
LO & IF Isolation	49dB typ.
IF & RF Isolation	39dB typ.

Mechanical


Size^[1]	17.5*16.5*8mm 0.689*0.65*0.315in
Connectors	2.92mm Female
Mounting	4*Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature	-40 ~ +85°C
------------------------------	-------------

Construction

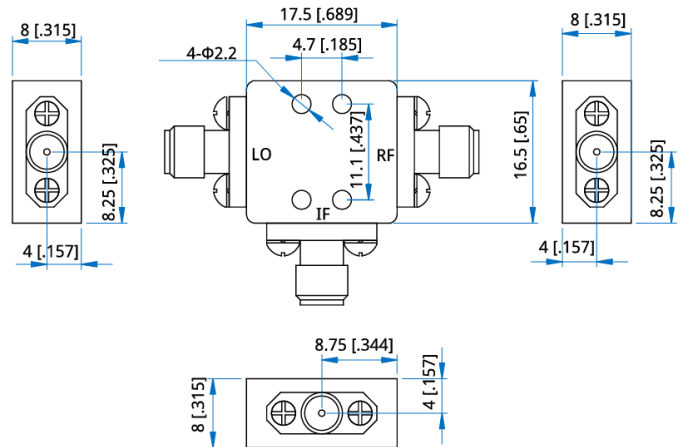

Note(s)

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]