

# Precision Test Adapters

## 2.4 mm(F) to 2.4 mm(F)



**Microwave Farm's Precision Test Adapters** are designed based on precision microwave interconnection technologies.

This 2.4 mm(F) to 2.4 mm(F) adapter is manufactured to precise microwave specifications and constructed with female gender on side 1 and female gender side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 50 GHz



### ■ Features

- Frequency range : DC to 50 GHz
- VSWR : 1.20: 1(Max) @ 50 GHz
- Stainless steel (passivated)


### ■ Specification

Scope	Specification	MFAD02F02FS1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 50 GHz
	VSWR (Max)	1.20 : 1
Material	Dielectric	Special dielectric
	Center Contact	Beryllium copper with gold plated
	Body	Passivated Stainless Steel

\* RoHS Compliant

### ■ Drawing

Part No.: MFAD02F02FS1

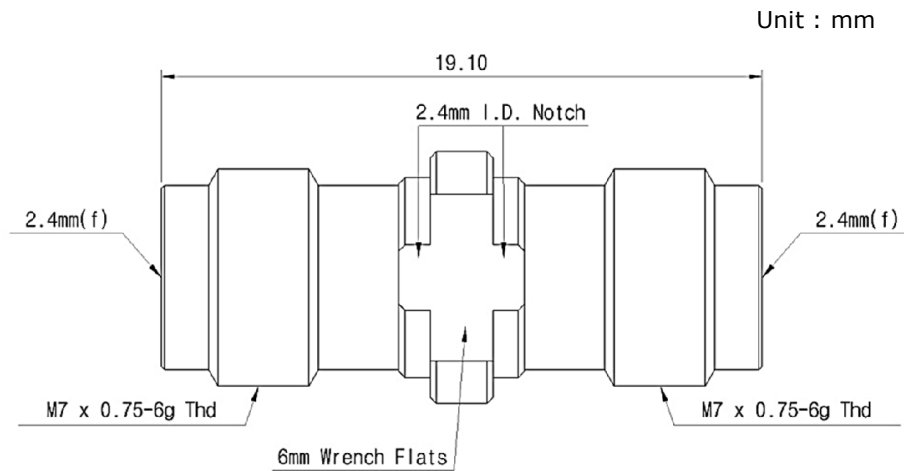

### ■ Test Result

- Frequency : 10 MHz to 50 GHz

