

Microwave Farm's Test Adapters are designed based on precision RF interconnection technologies.

This N(F) to SMA(M) adapter is manufactured to precise RF specifications and constructed with female gender on side1 and male gender side 2.

The Test Adapter interfaces ensure an excellent RF performance up to 10 GHz.



■ Features

- Frequency range : DC to 10 GHz
- VSWR : 1.20 : 1(Max) @ 10 GHz


■ Specification

Scope	Specification	AD07F06MS1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 10 GHz
	VSWR (Max)	1.20 : 1
Material	Dielectric	PTFE
	Center Contact	Beryllium copper with gold plated
	Body	Brass with Nickel plated

* RoHS Compliant

■ Drawing

Part No.: AD07F06MS1

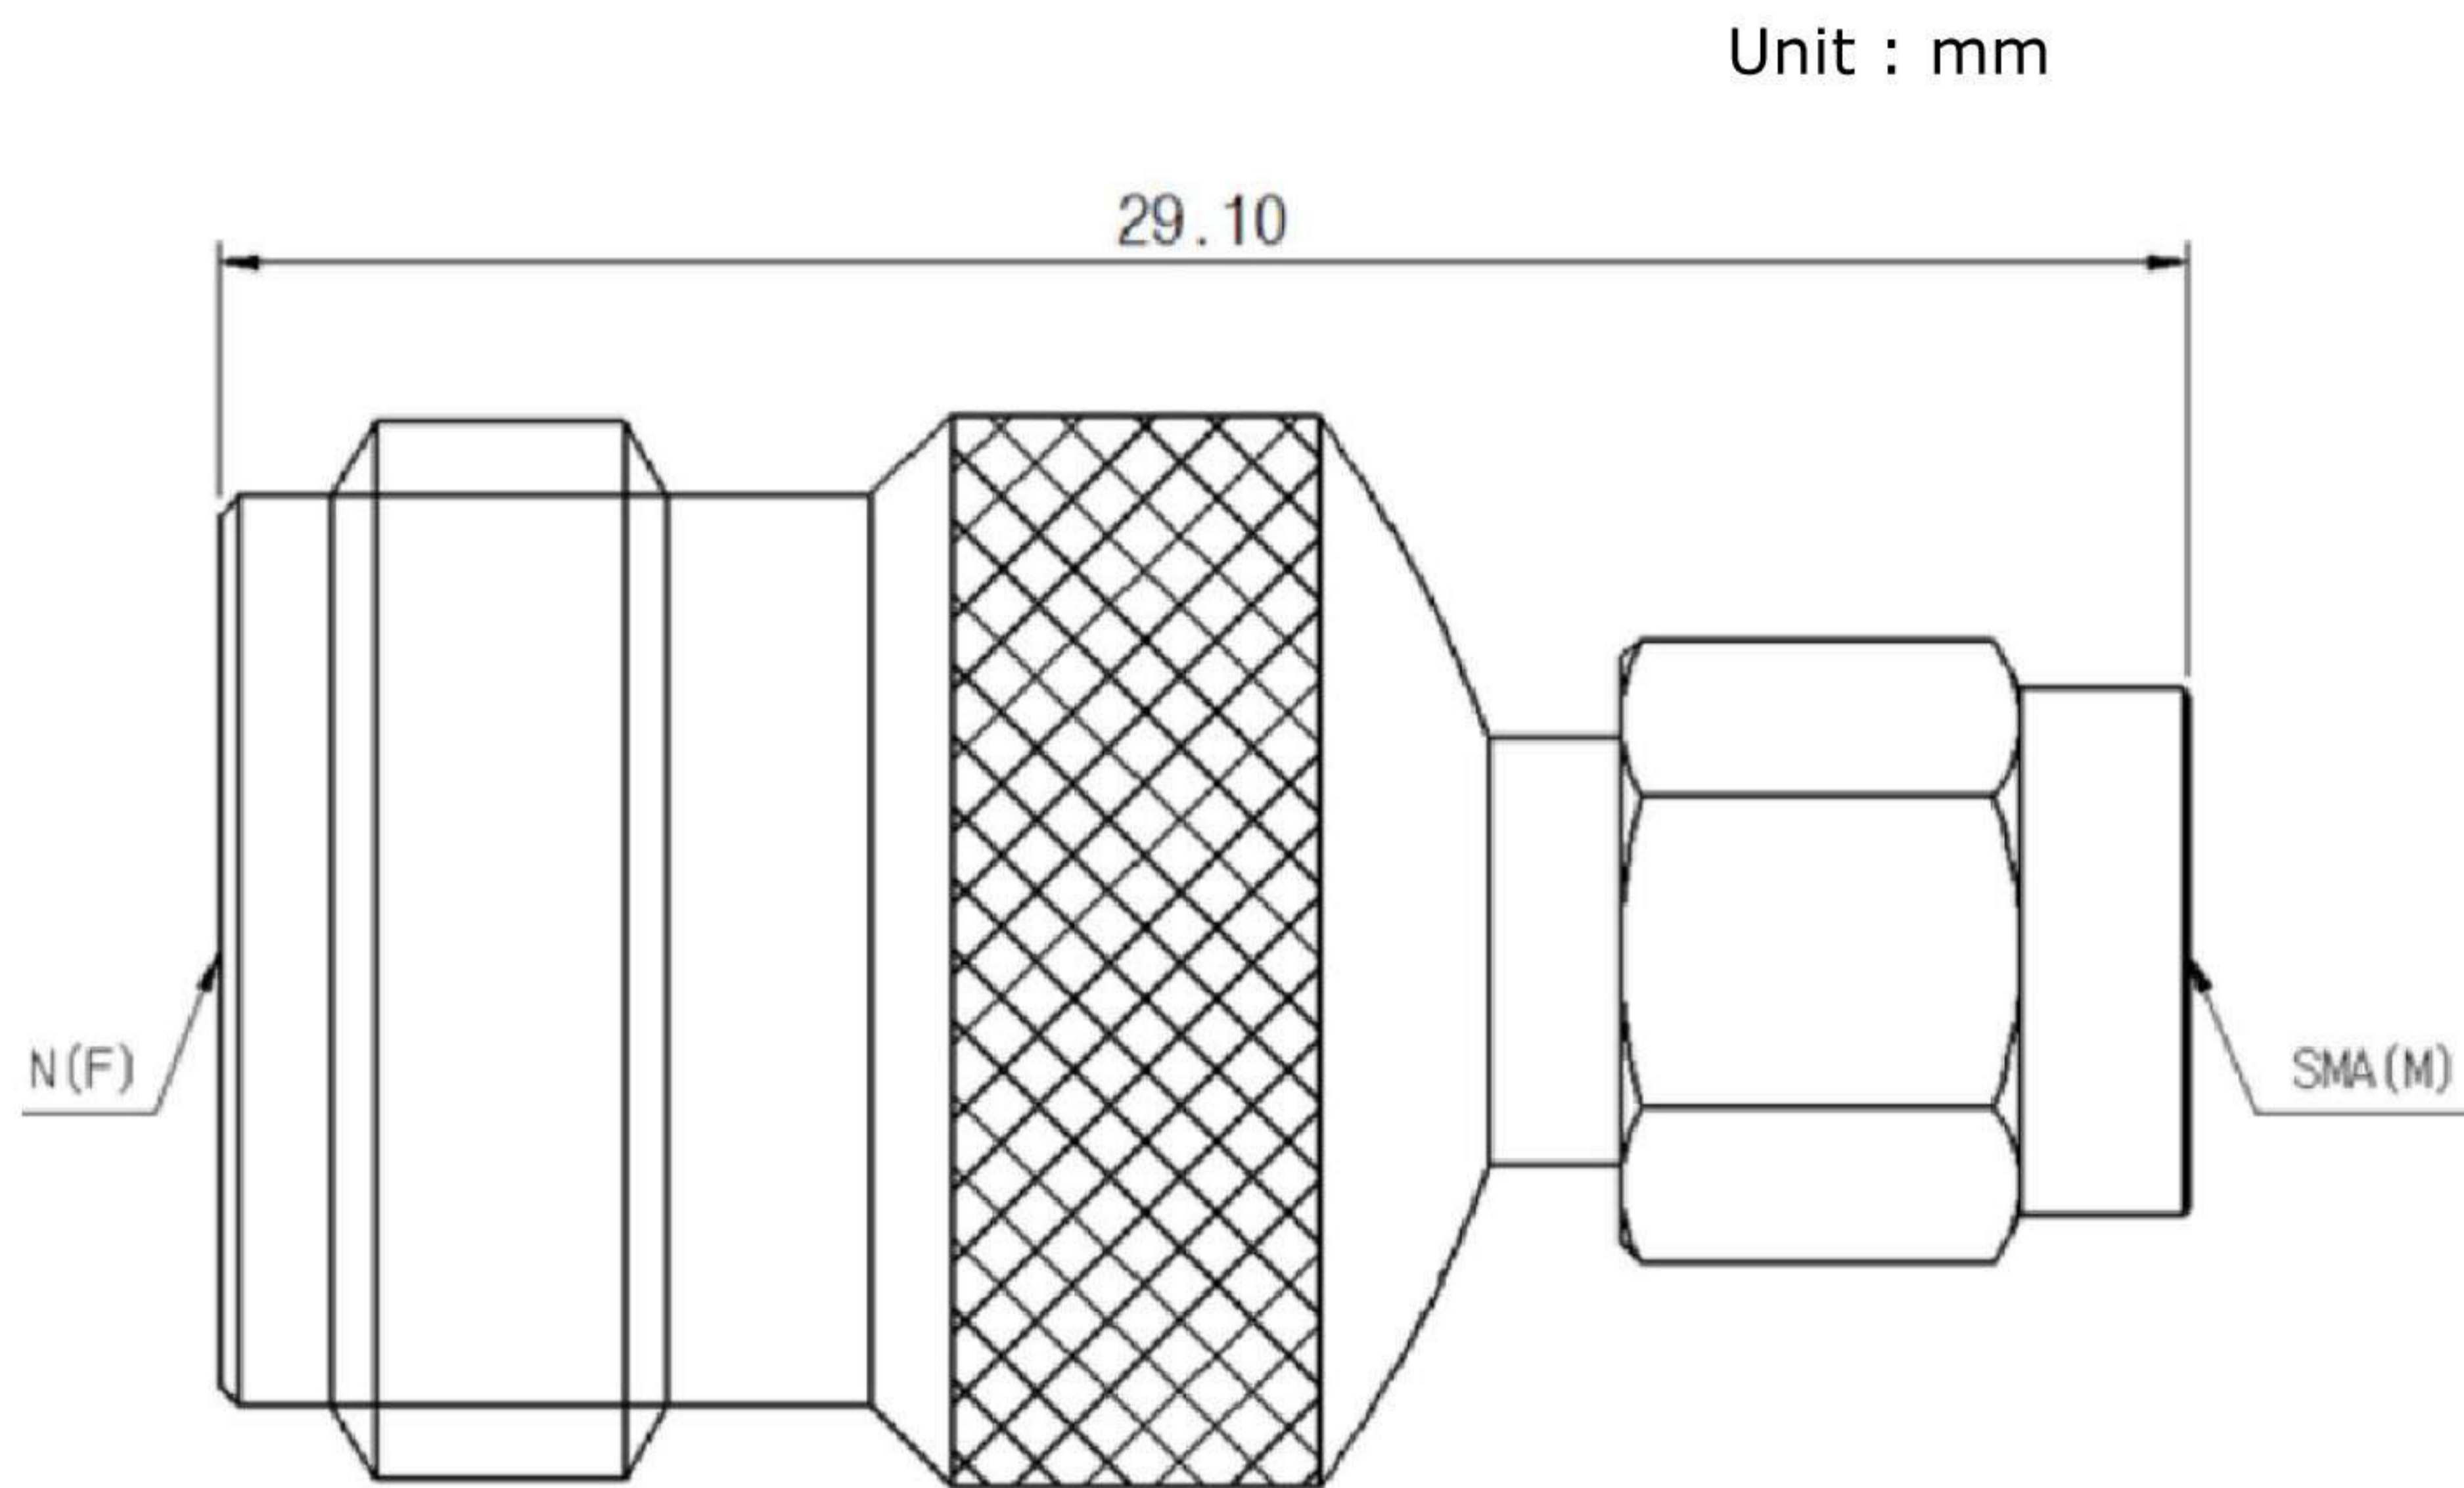

■ Measurement Data

