

Precision Test Adapters

SMA(M) to SMA(F)



Microwave Farm's Precision Test Adapters are designed based on precision microwave interconnection technologies.

This SMA(M) to SMA(F) adapter is manufactured to precise microwave specifications and constructed with male gender on side 1 and female gender side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 18 GHz



■ Features

- Frequency range : DC to 18 GHz
- VSWR : 1.15 : 1(Max) @ 18 GHz
- Stainless steel (passivated)


■ Specification

| Scope | Specification | MFAD06M06FS1 |
|------------|----------------------|-----------------------------------|
| Electrical | Impedance(Ohm) | 50 |
| | Operation Freq.(GHz) | DC to 18 GHz |
| | VSWR (Max) | 1.15 : 1 |
| Material | Dielectric | PTFE |
| | Center Contact | Beryllium copper with gold plated |
| | Body | Passivated Stainless Steel |

* RoHS Compliant

Drawing

Part No.: MFAD06M06FS1

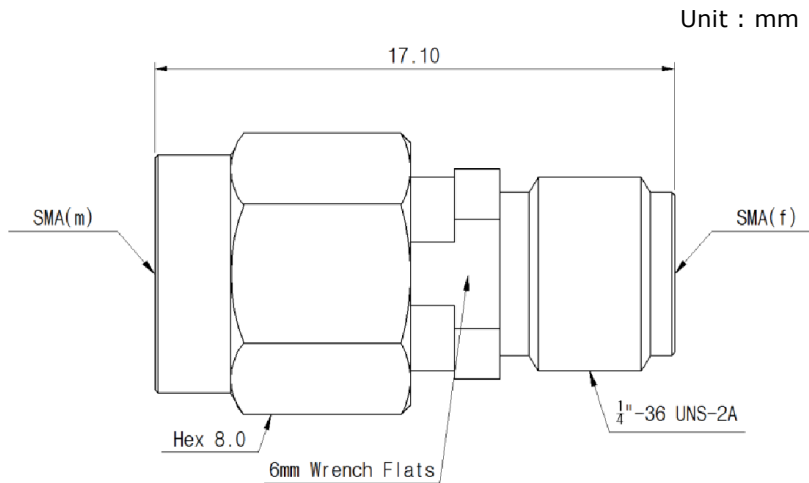

Test Result

