

Precision Test Adapters

SMA(M) to SMA(M)



Microwave Farm's Precision Test Adapters are designed based on precision microwave interconnection technologies.

This SMA(M) to SMA(M) adapter is manufactured to precise microwave specifications and constructed with male gender on side 1 and male gender side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 18 GHz



■ Features

- Frequency range : DC to 18 GHz
- VSWR : 1.20 : 1(Max) @ 18 GHz
- Stainless steel (passivated)

■ Specification


Scope	Specification	MFAD06M06MS1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 18 GHz
	VSWR (Max)	1.20 : 1
Material	Dielectric	Special dielectric
	Center Contact	Brass with gold plated
	Body	Passivated Stainless Steel

* RoHS Compliant

Drawing

Part No.: MFAD06M06MS1

Unit : mm

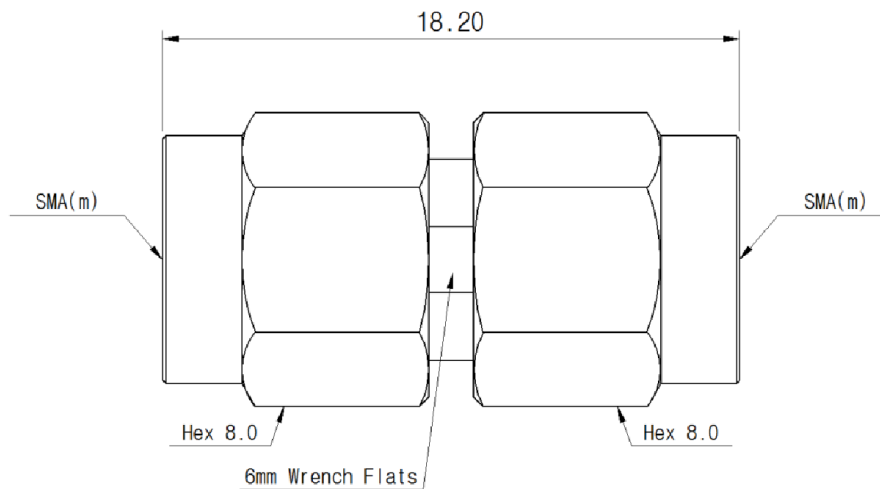

Test Result

