

# Precision Test Adapters



## 2.4 mm(M) to 2.92 mm(M) : Right Angle type

**Microwave Farm's Precision Test Adapters** are designed based on precision microwave interconnection technologies.

This 2.4 mm(M) to 2.92 mm(M) **Right Angle adapter** is manufactured to precise microwave specifications and constructed with male gender on side 1 and male gender on side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 40 GHz



### ■ Features

- Frequency range : DC to 40 GHz
- VSWR 1.20 : 1 (Max)
- Body : Stainless steel (passivated)

### ■ Specification

Scope	Specification	MFAD02M03MR1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 40 GHz
	VSWR (Max)	1.20 : 1
Material	Dielectric	Special dielectric
	Center Contact	Brass with gold plated
	Body	Passivated Stainless Steel

\* RoHS Compliant

# Precision Test Adapters




## 2.4 mm(M) to 2.92 mm(M) : Right Angle type

### ■ Drawing

Part No.: MFAD02M03MR1

Unit : mm[inch]

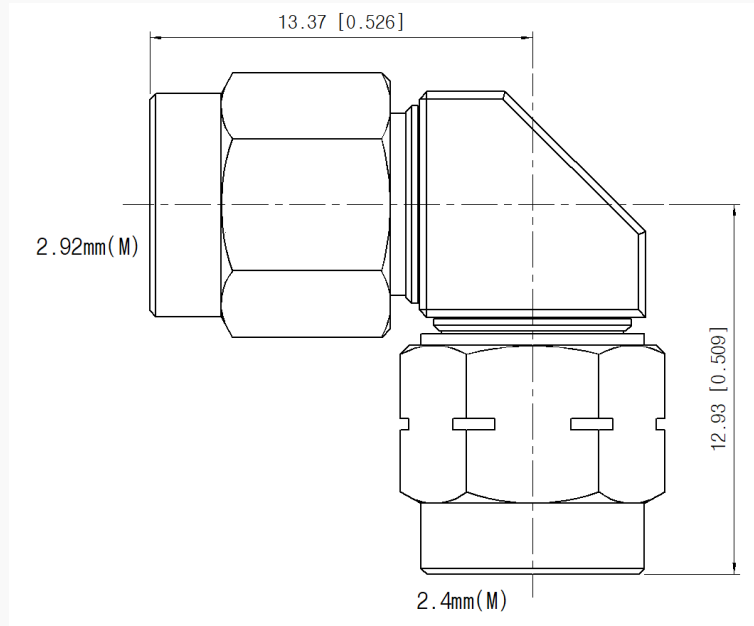

### ■ Test Result

▪ Frequency : 10 MHz to 40 GHz

