

# Precision Test Adapters

## 2.4 mm(M) to 2.4 mm(M)



**Microwave Farm's Precision Test Adapters** are designed based on precision microwave interconnection technologies.

This 2.4 mm(M) to 2.4 mm(M) adapter is manufactured to precise microwave specifications and constructed with male gender on side 1 and male gender side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 50 GHz



### ■ Features

- Frequency range : DC to 50 GHz
- VSWR : 1.20: 1(Max) @ 50 GHz
- Stainless steel (passivated)

### ■ Specification

Scope	Specification	MFAD02M02MS1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 50 GHz
	VSWR (Max)	1.20 : 1
Material	Dielectric	Special dielectric
	Center Contact	Brass with gold plated
	Body	Passivated Stainless Steel


\* RoHS Compliant

# Precision Test Adapters

## 2.4 mm(M) to 2.4 mm(M)

### ■ Drawing

Part No.: MFAD02M02MS1

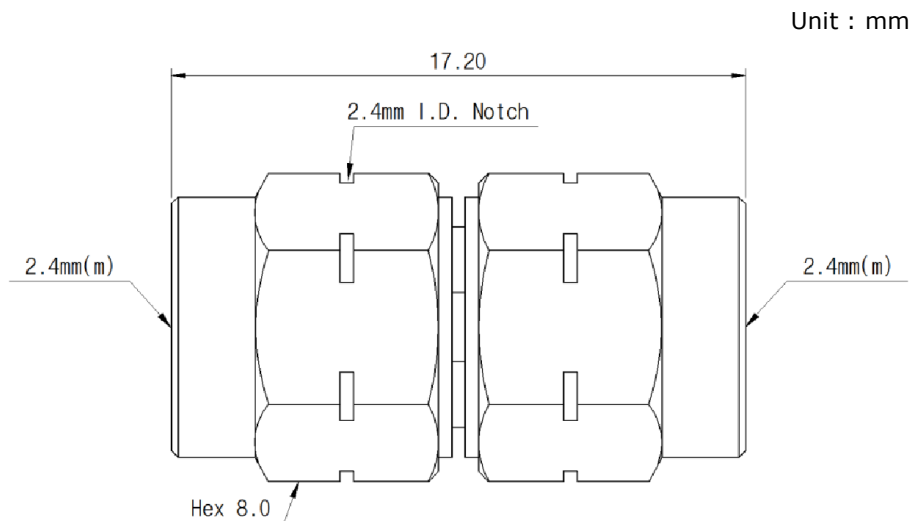

### ■ Test Result

- Frequency : 10 MHz to 50 GHz

