

Precision Test Adapters

1.85 mm(F) to 2.92 mm(M)



Microwave Farm's Precision Test Adapters are designed based on precision microwave interconnection technologies.

This 1.85 mm(F) to 2.92 mm(M) adapter is manufactured to precise microwave specifications and constructed with female gender on side 1 and male gender side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 40 GHz



■ Features

- Frequency range : DC to 40 GHz
- VSWR : 1.10: 1(Max) @ 40 GHz
- Stainless steel (passivated)

■ Specification

| Scope | Specification | MFAD01F03MS1 |
|------------|----------------------|-------------------------------|
| Electrical | Impedance(Ohm) | 40 |
| | Operation Freq.(GHz) | DC to 40 GHz |
| | VSWR (Max) | 1.10: 1 |
| Material | Dielectric | Special dielectric |
| | Center Contact | Brass with gold plated |
| | Body | Passivated Stainless Steel |

** RoHS Compliant*


Precision Test Adapters

1.85 mm(F) to 2.92 mm(M)

■ Drawing

Part No.: MFAD01F03MS1

Unit : mm

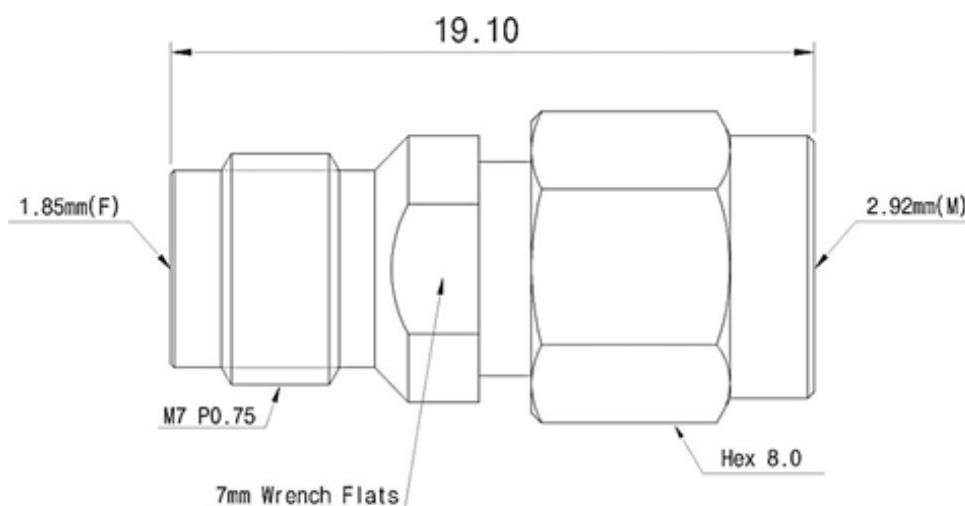

■ Test Result

▪ Frequency : 10 MHz to 40 GHz

