

Precision Test Adapters

2.92 mm(F) to 3.5 mm(M)



Microwave Farm's Precision Test Adapters are designed based on precision microwave interconnection technologies. This 2.92 mm(F) to 3.5 mm(M) adapter is manufactured to precise Microwave specifications and constructed with female gender on side 1 and male gender side 2. The precision microwave connector interfaces ensure an excellent microwave performance up to 34 GHz



■ Features

- Frequency range : DC to 34 GHz
- VSWR : 1.25 : 1(Max) @ 34 GHz
- Stainless steel (passivated)

■ Specification

| Scope | Specification | MFAD03F04MS1 |
|------------|----------------------|-------------------------------|
| Electrical | Impedance(Ohm) | 50 |
| | Operation Freq.(GHz) | DC to 34 GHz |
| | VSWR (Max) | 1.25: 1 |
| Material | Dielectric | Special dielectric |
| | Center Contact | BeCu with gold plated |
| | Body | Passivated Stainless Steel |

* RoHS Compliant

Precision Test Adapters


2.92 mm(F) to 3.5 mm(M)



■ Drawing

Part No.: MFAD03F04MS1

Unit : mm [inch]

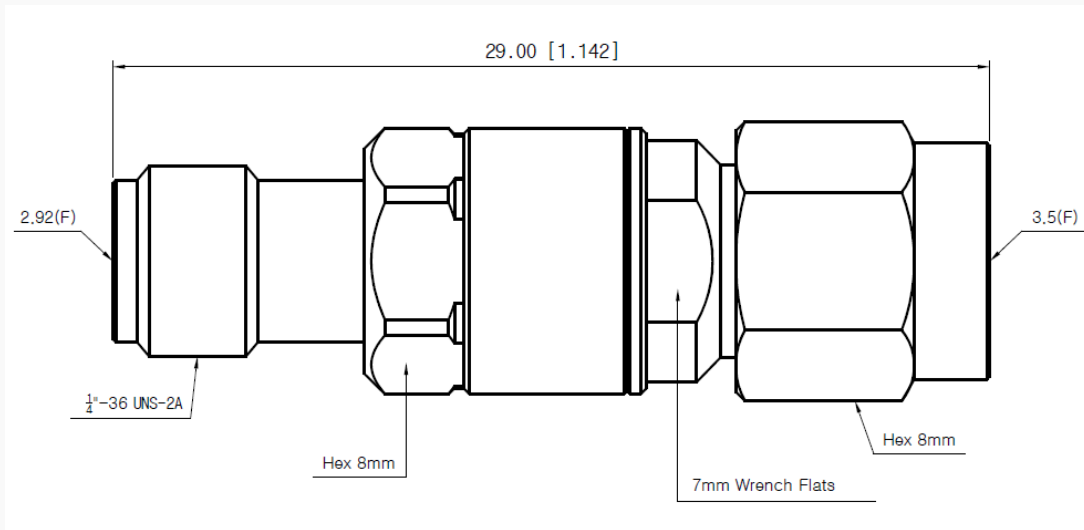

■ Test Result

- Frequency : 10 MHz to 34 GHz

