

**Microwave Farm's terminations** are composed of broadband, due to the coaxial construction, It offers a excellent performance specified from DC to 50 GHz.  
Precision 2.4 mm coaxial connector interfaces ensure an good impedance match across wide bandwidth.

### ■ Features

- DC to 50 GHz
- VSWR (Max): 1.10
- 2.4 mm (Male) type




### ■ Specification

Scope	Specification	MFTM02-01-06
Electrical	Impedance(Ohm)	50
	Freq. range (GHz)	DC to 50 GHz
	VSWR (Max)	1.10 : 1
	Power rating	0.5 Watts
Material	Center Contact	BeCu with gold plated
	Body & Connector	Stainless Steel

\* RoHS Compliant

### ■ Drawing

Unit : mm[inch]

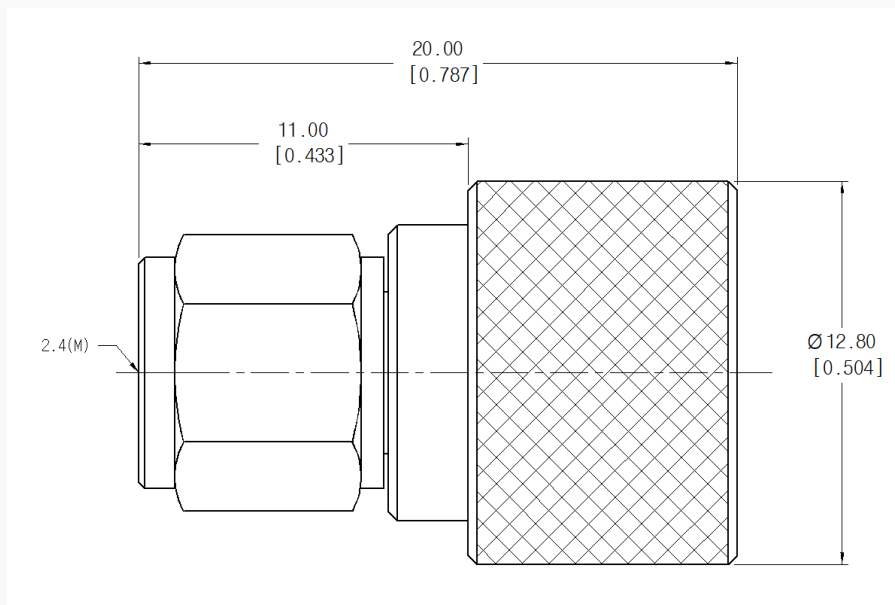

### ■ Test Result (Return Loss)

Freq: 10 MHz to 50 GHz

